

FL20C

Simplified centrifugal pump

APPLIICATIONS


The FL20C centrifugal pump is well known for its small size and high performance. Despite their small size, these pumps can provide flows up to 12 m³/h with good outcomes. FL20C pumps can be used in transferring and handling applications of low viscosity products such as water, oils, glycols and wines.

CHARACTERISTICS


Level of finish: Industrial
 Material: SS AISI 316
 0.37kW motor at 3000 turnovers per minute
 0.25kW motor at 1500 turnovers per minute
 Impeller: ø90 Half-open impeller
 Suction / Discharge: 1" / ¾" BSP

OPTIONS

Motor covering
 Other connections: DIN 11851, CLAMP, SMS, etc.
 Platform, trolley

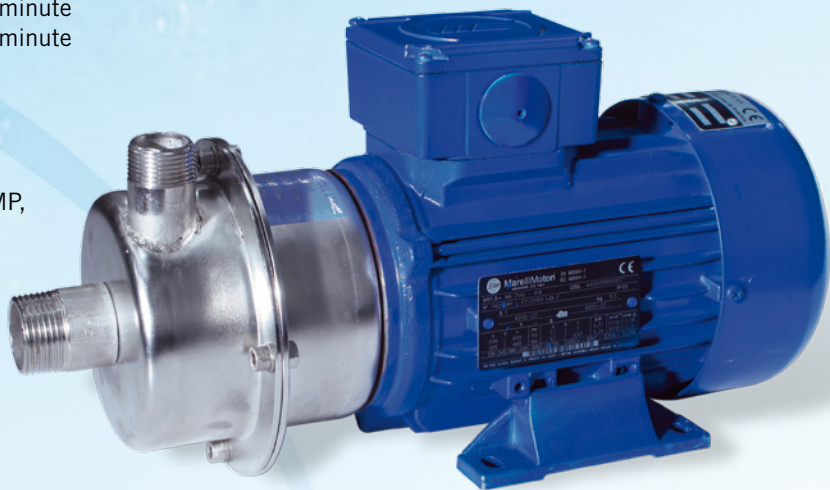

PERFORMANCE CURVE FL20C

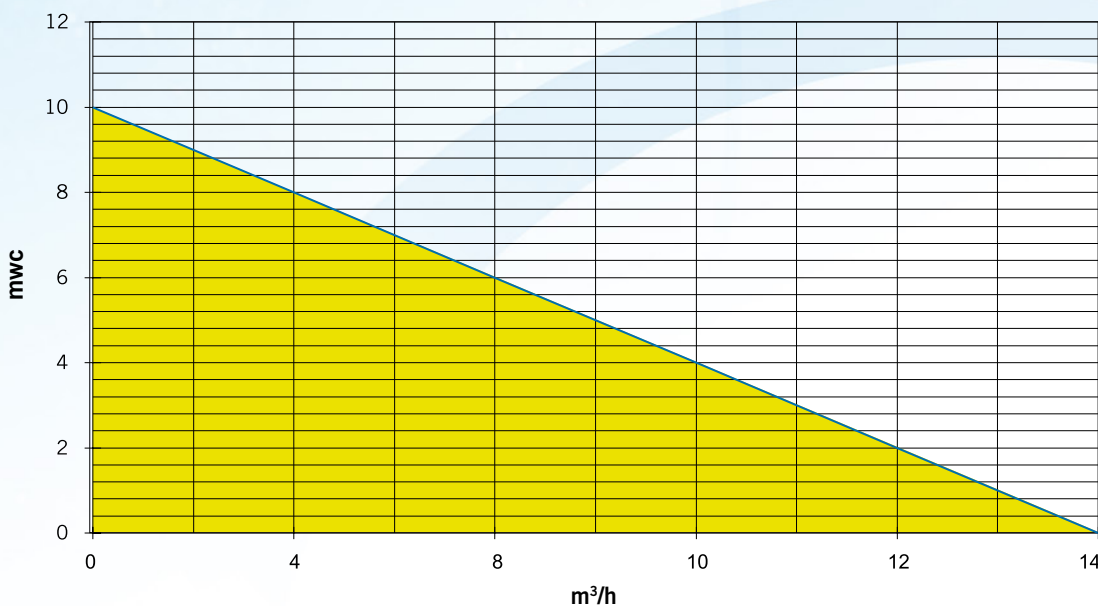

(for other impeller and motor combinations, please ask)

DIMENSIONS AND CHARACTERISTICS OF FL20C MODEL

