KIT PS2

Kit PS2 are mechanical pressure switches used to control the pumps in traditional boosting systems, with an adaptor with pressure gauge and 3 hydraulic fittings that allow to conect the pressure switch in 5 diferents positions together with the accumulation tank.
It is a device that automatically adjusts the starting and the stop of the pump based on the pressure and its differential. The original factory setting can be changed using the internal regulating system.

KIT PS2



OPERATING CHARACTERISTICS

- Pressure switch used in water system.
- The switch start and stop the water pump automatically according to the setting pressure value.
- Independent adjustment of starting pressure and differential.
- Composed by a five-position pressure switch and a pressure gauge.
- Hydraulic connections: 1 way G1"male + 2 way G1" female.

TECHNICAL CHARACTERISTICS

	KIT PS2
• Power supply voltage	110-240 Vac
• Max. current	12A
• Frequency	50/60 Hz
• Max. pump power	2 HP
• Max. environment temperature	40°C
• Protection degree	IP20
• Range of starting pressure	1,4-2,8 bar

DIMENSIONS

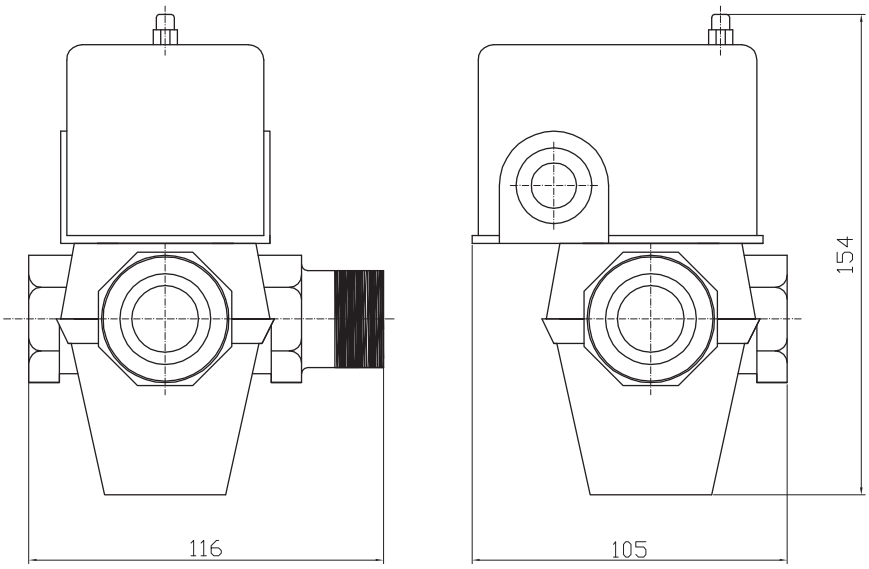

KIT PS2