

SEWAGE & DRAINAGE PUMPS

Submersible Pumps	65
Top, Top-GM, Top-LA, Top Floor, Top Vortex, Top Vortex-Gm, Tex Vortex	
Submersible Pumps - Stainless Steel	67
RX, RX-GM	
Submersible Pumps Vortex - Stainless Steel	68
RX Vortex, RX-GM Vortex, VX-ST, VX-MF	
Submersible Double - Channel Pumps - Stainless Steel	70
BC-ST, BC-MF	
Submersible Drainage Pumps	71
D, DC	
Submersible Vortex Pumps	72
ZX, VX, Family	
Submersible Double - Channel Pumps	74
BC	
Submersible Pumps - Cast Iron	75
VXC, MC, VXC-F, MC-F, VX40, BC35, VXC4, MC4	
Submersible Pumps with Grinder	80
Tritus	
Dreno Drainage / Sewage Pumps	81
Compatta Evo, DNB, A Series, V Series, VTH Series, G Series	
Dreno Accessories	88

TOP



Submersible Drainage Pumps for Clear Water

MODEL	STOCK CODE	PRICE	PRICE	POWER		PERFORMANCE		
Single-Phase		Single	4+	P2		Q	H	
		£	£	kW	HP	L/min	m	
	Top 1	2300002	305.00	287.00	0.25	0.33	20 - 160	6 - 1
	Top 2	2300012	327.00	308.00	0.37	0.5	20 - 220	8 - 1
	Top 3	2300022	374.00	351.00	0.55	0.75	20 - 260	10 - 2
Top 4	2300030	573.00	539.00	0.75	1	20 - 320	12.5 - 2	
Top 5	2300040	590.00	554.00	0.92	1.25	20 - 360	15 - 2.5	

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for Top 4-5
- External float switch: standard issue. Manual versions without float switch are available.

Attention: Standard EN 60335-2-41 requires the use of a 10 metres cable in outdoor applications

TOP-GM



Models with Vertical Magnetic Float Switch*

MODEL	STOCK CODE	PRICE	PRICE	POWER		PERFORMANCE		
Single-Phase		Single	4+	P2		Q	H	
		£		kW	HP	L/min	m	
	Top 1 - GM	2300052	340.00	319.00	0.25	0.33	20 - 160	6 - 1
	Top 2 - GM	2300062	364.00	342.00	0.37	0.5	20 - 220	8 - 1
	Top 3 - GM	2300072	410.00	386.00	0.55	0.75	20 - 260	10 - 2
Top 4 - GM	2300080	606.00	570.00	0.75	1	20 - 320	12.5 - 2	
Top 5 - GM	2300090	626.00	589.00	0.92	1.25	20 - 360	15 - 2.5	

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for Top 4-5 GM
- External float switch: standard issue.

* SUITABLE FOR SMALL DRAINAGE SUMPS

Attention: Standard EN 60335-2-41 requires the use of a 10 metres cable in outdoor applications

TOP-LA



Versions Suitable for Aggressive Liquids

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
Single-Phase		£	P ₂		Q	H
			kW	HP	L/min	m
Top 2 - LA	2300100	405.00	0.37	0.50	20 - 220	8 - 1
Top 3 - LA	2300110	452.00	0.55	0.75	20 - 260	10 - 2

- Power cable: 10 metres as standard
- External float switch: standard issue. Manual versions without float switch are available.
- Patent Pending n. BO2015A000116
- Registered Community Design n. 342159-0011

TOP-LA: metallic components in contact with the pumped liquid in AISI 316 stainless steel

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

TOP-FLOOR



Low Suction Version Submersible Pumps for Clear Water*

MODEL	STOCK CODE	PRICE	PRICE	POWER		PERFORMANCE	
		Single	4+	P ₂		Q	H
Single-Phase		£		kW	HP	L/min	m
Top 1 - Floor	2300123	321.00	301.00	0.25	0.33	20 - 120	6 - 2
Top 2 - Floor	2300133	327.00	308.00	0.37	0.50	20 - 160	8 - 2.4
Top 3 - Floor	2305463	374.00	351.00	0.55	0.75	20 - 170	9.8 - 2.6

- Power cable: 10 metres as standard (5 meters available on request)
- Registered Community Design n. 342159-0011

* The pump is designed to guarantee suction down to 2mm above ground level

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

TOP-VORTEX



Submersible Vortex Pumps for Dirty Water*

MODEL	STOCK CODE	PRICE	PRICE	POWER		PERFORMANCE	
		Single	4+	P ₂		Q	H
Single-Phase		£	£	kW	HP	L/min	m
Top 1 - Vortex	2300142	326.00	306.00	0.25	0.33	20 - 140	6.3 - 1.6
Top 2 - Vortex	2300152	332.00	312.00	0.37	0.50	20 - 155	7 - 2
Top 3 - Vortex	2300162	394.00	370.00	0.55	0.75	20 - 170	8.2 - 2.8

- Power cable: 10 metres as standard (5 meters available on request)
- External float switch: standard issue. Manual versions without float switch are available.

* Passage of suspended solids up to Ø 20 mm

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

TOP-VORTEX-GM



Models with Vertical Magnetic Float Switch*

MODEL	STOCK CODE	PRICE	PRICE	POWER		PERFORMANCE	
		Single	4+	P ₂		Q	H
Single-Phase		£	£	kW	HP	L/min	m
Top 1 - Vortex/GM	2300172	380.00	358.00	0.25	0.33	20 - 140	6.3 - 1.6
Top 2 - Vortex/GM	2300182	387.00	364.00	0.37	0.50	20 - 155	7.1 - 2
Top 3 - Vortex/GM	2300192	434.00	408.00	0.55	0.75	20 - 170	8.2 - 2.8

- Power cable: 10 metres as standard (5 meters available on request)
- External float switch: standard issue.

* Passage of suspended solids up to Ø 20 mm

* SUITABLE FOR SMALL DRAINAGE SUMPS

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

TEX-VORTEX



Models with Adjustable Magnetic Float Switch*

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
Single-Phase		£	P ₂		Q	H
			kW	HP	L/min	m
Tex 2	2300200	437.00	0.37	0.50	20 - 220	8.3 - 2
Tex 3	2300210	460.00	0.55	0.75	20 - 240	9.8 - 3



- Power cable: 10 metres as standard (5 meters available on request)
- Adjustable Magnetic Float Switch
- Selector for automatic or manual operations

* Passage of suspended solids up to Ø 30 mm

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

RX



Submersible Pumps for Clear Water

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE
Single Phase		Single £	4 + £	Three Phase		Single £	4 + £	P ₂ kW	Q L/min H m
RXm 1	2300222	398.00	374.00	-	-	-	-	0.25	20 - 160 7 - 2
RXm 2	2300232	444.00	417.00	RX 2	2300282	469.00	441.00	0.37	20 - 190 9.5 - 2.8
RXm 3	2300242	510.00	479.00	RX 3	2300292	537.00	504.00	0.55	20 - 220 11.5 - 3.5
RXm 4	2300250	1,148.00	1,079.00	RX 4	2300300	1,165.00	1,095.00	0.75	20 - 270 15 - 4
RXm 5	2300260	1,193.00	1,121.00	RX 5	2300310	1,194.00	1,123.00	1.1	20 - 320 19.5 - 5

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for RX 4-5
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.
- Impeller: AISI 304 stainless steel

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

RX-GM



Models with Vertical Magnetic Float Switch*

MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE
Single-Phase		Single £	4 + £	P ₂ kW	Q L/min H m
RXm 1-GM	2300322	436.00	410.00	0.25	20 - 160 7 - 2
RXm 2 -GM	2300332	488.00	459.00	0.37	20 - 190 9.5 - 2.8
RXm 3 -GM	2300342	533.00	501.00	0.55	20 - 220 11.5 - 3.5
RXm 4 -GM	2300350	1,133.00	1,065.00	0.75	20 - 270 15 - 4
RXm 5-GM	2300360	1,180.00	1,110.00	1.1	20 - 320 19.5 - 5

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for RX 4-5 GM
- External float switch: standard issue
- Impeller: AISI 304 stainless steel

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

RX-VORTEX



Submersible Vortex Pumps for Dirty Water*

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE
Single Phase		£	4+ £	Three Phase		Single £	4+ £	P ₂ kW	Q L/min H m
RXm 2/20	2300372	488.00	459.00	RX 2/20	2300412	491.00	462.00	0.37	20 - 190 7.5 - 2
RXm 3/20	2300382	523.00	492.00	RX 3/20	2300422	547.00	514.00	0.55	20 - 240 9.5 - 2
RXm 4/40	2300390	1,181.00	1,110.00	RX 4/40	2300430	1,201.00	1,129.00	0.75	20 - 340 11 - 2
RXm 5/40	2300400	1,228.00	1,154.00	RX 5/40	2300440	1,228.00	1,154.00	1.1	20 - 380 12.5 - 2

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for RX 4-5/40
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.
- Impeller: VORTEX AISI 304 stainless steel

* Max. passage of suspended solids:

RX 2/20, RX 3/20 up to Ø 20mm

RX 4/40, RX 5/40 up to Ø 40mm

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

RX-GM VORTEX



Models c/w Vertical Magnetic Float Switch*

MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE
Single-Phase		Single £	4+ £	P ₂ kW HP	Q L/min H m
RXm 2/20 - GM	2300452	523.00	492.00	0.37 0.50	20 - 190 7.5 - 2
RXm 3/20 - GM	2300462	553.00	520.00	0.55 0.75	20 - 240 9.5 - 2
RXm 4/40 - GM	2300470	1,218.00	1,145.00	0.75 1	20 - 340 11 - 2
RXm 5/40 - GM	2300480	1,261.00	1,185.00	1.1 1.5	20 - 380 12.5 - 2

- Power cable: 10 metres as standard (5 meters available on request)
- Two mechanical seals separated by an oil chamber for RX 4-5/40 GM
- External float switch: standard issue on Single-Phase versions
- Impeller: VORTEX AISI 304 stainless steel

* Max. passage of suspended solids:

RX 2/20 - GM, RX 3/20 - GM up to Ø 20mm

RX 4/40 - GM, RX 5/40 - GM up to Ø 40mm

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%

Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

VX-ST



Submersible Vortex Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE	
			4+				4+	P ₂	Q	H
Single-Phase		£	£	Three-Phase		£	£	kW	L/min	m
VXm 8/35-ST	2300510	690.00	649.00	VX 8/35-ST	2300590	716.00	673.00	0.55	50 - 350	8.5 - 1
VXm 10/35-ST	2300520	707.00	664.00	VX 10/35-ST	2300600	733.00	689.00	0.75	50 - 400	10.5 - 2
VXm 15/35-ST	2300530	846.00	795.00	VX 15/35-ST	2300610	846.00	795.00	1.1	50 - 500	14 - 2
VXm 20/35-ST	2300540	1,008.00	948.00	VX 20/35-ST	2300620	1,008.00	948.00	1.5	50 - 525	16.5 - 2.5
VXm 8/50-ST	2300550	690.00	649.00	VX 8/50-ST	2300630	716.00	673.00	0.55	50 - 450	7 - 1.5
VXm 10/50-ST	2300560	710.00	667.00	VX 10/50-ST	2300640	733.00	689.00	0.75	50 - 550	9.5 - 1.5
VXm 15/50-ST	2300570	846.00	795.00	VX 15/50-ST	2300650	846.00	795.00	1.1	50 - 650	13 - 2
VXm 20/50-ST	2300580	1,008.00	948.00	VX 20/50-ST	2300660	1,008.00	948.00	1.5	50 - 700	14.5 - 3

- Power cable: 10 metres standard equipment
- Pump body: stamped stainless steel AISI 304
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:

VX /35-ST up to Ø 40mm

VX /50-ST up to Ø 50mm

Impeller type:

VORTEX AISI 304 stainless steel

VORTEX AISI 304 stainless steel

VX-MF



Submersible Vortex Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
VXm 8/35-MF	2300670	1,086.00	VX 8/35-MF	2300750	1,115.00	0.55	0.75	50 - 350	8 - 1
VXm 10/35-MF	2300680	1,102.00	VX 10/35-MF	2300760	1,131.00	0.75	1	50 - 400	10 - 2
VXm 15/35-MF	2300690	1,241.00	VX 15/35-MF	2300770	1,261.00	1.1	1.5	50 - 500	13.5 - 2
VXm 20/35-MF	2300700	1,397.00	VX 20/35-MF	2300780	1,397.00	1.5	2.0	50 - 600	15 - 1.5
VXm 8/50-MF	2300710	1,102.00	VX 8/50-MF	2300790	1,131.00	0.55	0.75	50 - 450	6 - 1.5
VXm 10/50-MF	2300720	1,118.00	VX 10/50-MF	2300800	1,147.00	0.75	1	50 - 550	8.5 - 1.5
VXm 15/50-MF	2300730	1,241.00	VX 15/50-MF	2300810	1,241.00	1.1	1.5	50 - 650	11 - 2
VXm 20/50-MF	2300740	1,397.00	VX 20/50-MF	2300820	1,397.00	1.5	2.0	50 - 750	13 - 2.5

- Power cable: 10 metres standard equipment
- Pump body: cast stainless steel 316L
- Shaft: AISI 316L stainless steel
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:

VX /35-MF up to Ø 40mm

VX /50-MF up to Ø 50mm

Impeller type:

VORTEX AISI 304 stainless steel


VORTEX AISI 304 stainless steel

Guide Rail Kits

For Pump	Stock Code	DN	£
HORIZONTAL DELIVERY WITH ¾" RAILS (A)			
VX /35 ST, VX 35 MF	2300830	2"	165.00
VX /50 ST, VX 50 MF	2300840	2"	172.00
VERTICAL DELIVERY WITH ¾" RAILS (B)			
VX /35 ST, VX 35 MF	2300850	2 ½"	285.00
VX /50 ST, VX 50 MF	2300860	2 ½"	298.00

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%

Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

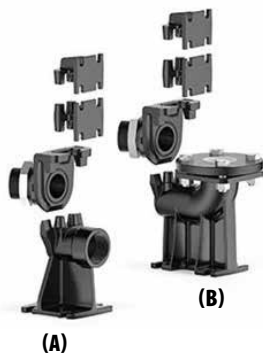

BC-ST



Submersible Double-Channel Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE
			4+				4+	P ₂	Q H
Single-Phase		£	£	Three-Phase		£	£	kW	L/min m
BCm 10/50-ST	2300870	830.00	780.00	BC 10/50-ST	2300900	856.00	804.00	0.75	50 - 600 11 - 2
BCm 15/50-ST	2300880	914.00	859.00	BC 15/50-ST	2300910	914.00	859.00	1.1	50 - 750 14 - 2
BCm 20/50-ST	2300890	1,086.00	1,021.00	BC 20/50-ST	2300920	1,076.00	1,012.00	1.5	50 - 850 16 - 3

- Power cable: 10 metres standard equipment
- Pump body: stamped stainless steel AISI 304
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:
BC /50-ST up to Ø 50mm

Impeller type:
DOUBLE-CHANNEL AISI 304 stainless steel

BC-MF



Submersible Double-Channel Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER	PERFORMANCE
						P ₂	Q H
Single-Phase		£	Three-Phase		£	kW HP	L/min m
BCm 10/50-MF	2300930	1,207.00	BC 10/50-MF	2300960	1,235.00	0.75 1	50 - 600 11 - 2
BCm 15/50-MF	2300940	1,329.00	BC 15/50-MF	2300970	1,329.00	1.1 1.5	50 - 750 14 - 2
BCm 20/50-MF	2300950	1,485.00	BC 20/50-MF	2300980	1,485.00	1.5 2.0	50 - 850 16 - 3

- Power cable: 10 metres standard equipment
- Pump body: cast stainless steel AISI 316L
- Shaft: AISI 316 stainless steel
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:
BC /50-MF up to Ø 50mm

Impeller type:
DOUBLE-CHANNEL AISI 304 stainless steel



Guide Rail Kits

For Pump	Stock Code	DN	£
HORIZONTAL DELIVERY WITH ¾" RAILS (A)			
BC/50 ST, BC 50 MF	2300840	2"	172.00
VERTICAL DELIVERY WITH ¾" RAILS (B)			
BC/50 ST, BC 50 MF	2300860	2 ½"	298.00

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

D



Submersible Pumps for Clear Water

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE	
			4+				4+	P ₂	Q	H
Single-Phase		£	£	Three-Phase		£	£	kW	L/min	m
Dm 8	2301050	630.00	592.00	D 8	2301090	646.00	607.00	0.55	25 - 250	12.5 - 3
Dm 10	2301060	643.00	604.00	D 10	2301100	660.00	620.00	0.75	25 - 300	15.5 - 3
Dm 20	2301070	676.00	636.00	D 20	2301110	679.00	639.00	0.75	25 - 250	19 - 8
Dm 30	2301080	761.00	715.00	D 30	2301120	761.00	715.00	1.1	25 - 275	26 - 9

- Power cable: 10 metres standard equipment
- Impeller: **technopolymer**
- Two mechanical seals separated by an oil chamber (For D30-N shaft with double mechanical seal with sealing ring)
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

DC



Cast Iron Submersible Drainage Pumps for Clear Water

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
DCm 42	2301170	2,226.00	DC 42	2301230	2,050.00	1.5	2	25 - 500	30.5 - 3
DCm 43	2301180	2,409.00	DC 43	2301240	2,160.00	2.2	3	25 - 550	35 - 4
-	-	-	DC 44	2301250	2,279.00	3	4	25 - 550	37.5 - 7.5

- Power cable: 10 metres standard equipment
- Impeller: **technopolymer**
- Two mechanical seals separated by an oil chamber (for DC30-N shaft with double mechanical seal with sealing ring)
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

ZX 1



Submersible Vortex Pumps for Dirty Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
Single-Phase		£	P ₂		Q	H
			kW	HP	L/min	m
ZXm 1B/40	2301260	575.00	0.50	0.70	25 - 350	8.5 - 1
ZXm 1A/40	2301270	582.00	0.60	0.85	25 - 400	10.5 - 1.5

- Power cable: 10 metres as standard
- External float switch: standard issue. Manual versions without float switch are available.
- Impeller: **VORTEX in technopolymer**
- Hose fitting supplied as a standard

* Passage of suspended solids up to Ø 40mm

ZX 2



Submersible Vortex Pumps for Dirty Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
Single-Phase		£	P ₂		Q	H
			kW	HP	L/min	m
ZXm 2/30	2305550	603.00	0.55	0.75	25 - 320	12.5 - 2
ZXm 2/40	2305560	613.00	0.55	0.75	25 - 400	11 - 2

- Power cable: 10 metres as standard
- External float switch: standard issue. Manual versions without float switch are available.
- Impeller: **VORTEX in technopolymer**
- Hose fitting supplied as a standard

* Passage of suspended solids up to Ø 40mm

ZX 2 GM



Submersible Vortex Pumps With Magnetic Float Switch

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
			P ₂		Q	H
Single-Phase		£	kW	HP	L/min	m
ZXm 2/30-GM	2305570	633.00	0.55	0.75	25 - 320	12.5 - 2
ZXm 2/40-GM	2305580	643.00	0.55	0.75	25 - 400	11 - 2

- Vertical sliding magnetic float switch (adjustable)
- Power cable 10m standard

FAMILY



Submersible Vortex Pumps for Dirty Water

NEW

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
			P ₂		Q	H
Single-Phase		£	kW	HP	L/min	m
Family	2305590	507.00	0.50	0.70	10 - 250	9.7 - 1

- Power cable: 10 metres as standard
- External float switch: standard issue. Manual versions without float switch are available.
- Impeller: **VORTEX in technopolymer**
- Hose fitting supplied as a standard

* Passage of suspended solids up to Ø 30mm

VX



Submersible Vortex Pumps for Wastewater/Sewage*

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE	
			4+				4+	P ₂	Q	H
Single-Phase		£	£	Three-Phase		£	£	kW	L/min	m
VXm 8/35	2301280	634.00	596.00	VX 8/35	2301360	650.00	611.00	0.55	50 - 350	8 - 1
VXm 10/35	2301290	660.00	620.00	VX 10/35	2301370	676.00	635.00	0.75	50 - 400	10 - 2
VXm 15/35	2301300	759.00	713.00	VX 15/35	2301380	775.00	728.00	1.1	50 - 500	13.5 - 2
VXm 20/35	2301310	911.00	856.00	VX 20/35	2301390	927.00	871.00	1.5	50 - 600	15 - 1.5
VXm 8/50	2301320	650.00	611.00	VX 8/50	2301400	666.00	626.00	0.55	50 - 450	6 - 1.5
VXm 10/50	2301330	679.00	638.00	VX 10/50	2301410	695.00	654.00	0.75	50 - 550	8.5 - 1.5
VXm 15/50	2301340	775.00	728.00	VX 15/50	2301420	775.00	728.00	1.1	50 - 650	11 - 2
VXm 20/50	2301350	927.00	871.00	VX 20/50	2301430	927.00	871.00	1.5	50 - 750	13 - 2.5

- Power cable: 10 metres as standard
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:

VX /35-N up to Ø 40mm

VX /50-N up to Ø 50mm

Impeller type:

VORTEX AISI 304 stainless steel

VORTEX AISI 304 stainless steel

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

BC



Submersible Double-Channel Pumps for Wastewater/Sewage*

MODEL	STOCK CODE	PRICE	PRICE	MODEL	STOCK CODE	PRICE	PRICE	POWER	PERFORMANCE	
			4+				4+	P ₂	Q	H
Single-Phase		£	£	Three-Phase		£	£	kW	L/min	m
BCm 10/50	2301440	773.00	727.00	BC 10/50	2301470	789.00	742.00	0.75	50 - 600	11 - 2
BCm 15/50	2301450	862.00	811.00	BC 15/50	2301480	862.00	811.00	1.1	50 - 750	14 - 2
BCm 20/50	2301460	1,021.00	960.00	BC 20/50	2301490	1,021.00	960.00	1.5	50 - 850	16 - 3

- Power cable: 10 metres as standard
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:
BC/50-N up to Ø 50mm

Impeller type:
Double-Channel AISI 304 stainless steel

Attention: Standard EN 60335-2-41 requires the use of a 10 metre cable in outdoor applications

110V available on most models - add 20% to above prices. 60Hz available to order - add 20%
Performance data is approximate for guidance only. For critical applications check with latest Catalogue or phone for duty confirmation.

VXC



Submersible Vortex Pumps for Wastewater/Sewage*

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
		£			£	kW	HP	L/min	m
Single-Phase			Three-Phase						
VXCm10/35	2301510	784.00	VXC10/35	2301570	801.00	0.75	1	50 - 400	10 - 2
VXCm15/35	2301520	884.00	VXC15/35	2301580	884.00	1.1	1.5	50 - 500	13.5 - 2
VXCm10/45	2301540	804.00	VXC10/45	2301600	821.00	0.75	1	50 - 550	8.5 - 1.5
VXCm15/45	2301550	907.00	VXC15/45	2301610	907.00	1.1	1.5	50 - 650	11 - 2

- Power cable: 10 metres as standard
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:
VXC /35-N up to Ø 40mm
VXC 45-N up to Ø 50mm

Impeller type:
VORTEX AISI 304 stainless steel
VORTEX AISI 304 stainless steel

MC



Submersible Double-Channel Pumps for Wastewater/Sewage*

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
		£			£	kW	HP	L/min	m
Single-Phase			Three-Phase						
MCm10/45	2301620	927.00	MC 10/45	2301640	944.00	0.75	1	50 - 600	11 - 2
MCm15/45	2301630	990.00	MC 15/45	2301650	990.00	1.1	1.5	50 - 750	14 - 2.7

- Power cable: 10 metres as standard
- Two mechanical seals separated by an oil chamber
- External float switch: standard issue on Single-Phase versions. Manual versions without float switch are available for Single-Phase and are standard for Three-Phase.

* Max. passage of suspended solids:
MC /45 up to Ø 40mm

Impeller type:
Double-channel AISI 304 stainless steel

VXC



Submersible Free-Standing Vortex Pumps for Wastewater/Sewage*

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
VXCm15/50	2301660	1,694.00	VXC15/50	2301720	1,628.00	1.1	1.5	100 - 600	1.1 - 1.5
VXCm20/50	2301670	1,768.00	VXC20/50	2301730	1,661.00	1.5	2	100 - 700	12.5 - 2.5
VXCm30/50	2301680	2,246.00	VXC30/50	2301740	1,694.00	2.2	3	100 - 850	15.5 - 2
-	-	-	VXC40/50	2301750	2,017.00	3	4	100 - 1050	19 - 2
VXCm15/65	2301690	1,768.00	VXC15/65	2301760	1,694.00	1.1	1.5	200 - 850	7 - 1
VXCm20/65	2301700	1,944.00	VXC20/65	2301770	1,728.00	1.5	2	200 - 1000	8.5 - 1
VXCm30/65	2301710	2,299.00	VXC30/65	2301780	1,768.00	2.2	3	200 - 1200	11.1 - 1.5
-	-	-	VXC40/65	2301790	2,093.00	3	4	200 - 1250	15 - 1.5

- Power cable: 10 metres as standard

* Max. passage of suspended solids:

VXC /50 up to Ø 50 mm

VXC /65 up to Ø 65 mm

Impeller type:

Cast iron VORTEX

Cast iron VORTEX

- Standard supply Single-Phase version:
 - external float switch (manual pump available on request)
 - capacitor box with capacitor included
 - protector built-in to the motor winding

2.2 kW Single-Phase pumps, the thermal overload protector must be connected to the external control panel

For three-phase water pumps three thermal overload protection are built-in to the winding, in series, and must be connected to the control box

MC



Submersible Free-Standing Double-Channel Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
MCm15/50	2301800	1,804.00	MC15/50	2301840	1,768.00	1.1	1.5	100 - 800	14 - 1
MCm20/50	2301810	1,861.00	MC20/50	2301850	1,804.00	1.5	2	100 - 900	16 - 1
MCm30/50	2301820	2,299.00	MC30/50	2301860	1,837.00	2.2	3	100 - 1100	22 - 2
-	-	-	MC40/50	2301870	2,093.00	3	4	100 - 1100	24 - 4
MCm30/65	2301830	2,425.00	MC30/65	2301880	1,894.00	2.2	3	200 - 1500	12 - 2
-	-	-	MC40/65	2301890	2,176.00	3	4	200 - 1600	15 - 4

- Power cable: 10 metres as standard

* Max. passage of suspended solids:

MC 50 up to Ø 50mm

MC 65 up to Ø 70mm

Impeller type:

Double-channel AISI 304 stainless steel

Double-channel AISI 304 stainless steel

- Standard supply Single-Phase version:
 - external float switch (manual pump available on request)
 - capacitor box with capacitor included
 - capacitor (inside the control panel)
 - protector built-in to the motor winding

2.2 kW Single-Phase pumps, the thermal overload protector must be connected to the external control panel

For three-phase water pumps three thermal overload protection are built-in to the winding, in series, and must be connected to the control box

VXC-F



MC-F



Submersible Guide Rail Mounted Vortex Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
VXCm15/50-F	2301900	1,778.00	VXC15/50-F	2301960	1,711.00	1.1	1.5	100 - 600	1.1 - 1.5
VXCm20/50-F	2301910	1,851.00	VXC20/50-F	2301970	1,744.00	1.5	2	100 - 700	12.5 - 2.5
VXCm30/50-F	2301920	2,329.00	VXC30/50-F	2301980	1,778.00	2.2	3	100 - 850	15.5 - 2
-	-	-	VXC40/50-F	2301990	2,100.00	3	4	100 - 1050	19 - 2
VXCm15/65-F	2301930	1,851.00	VXC15/65-F	2302000	1,778.00	1.1	1.5	200 - 850	7 - 1
VXCm20/65-F	2301940	2,027.00	VXC20/65-F	2302010	1,811.00	1.5	2	200 - 1000	8.5 - 1
VXCm30/65-F	2301950	2,382.00	VXC30/65-F	2302020	1,851.00	2.2	3	200 - 1200	11.1 - 1.5
-	-	-	VXC40/65-F	2302030	2,176.00	3	4	200 - 1250	15 - 1.5

- Power cable: 10 metres as standard
- Impeller: **cast iron VORTEX**

Submersible Guide Rail Mounted Double-Channel Pumps for Wastewater/Sewage

MODEL	STOCK CODE	PRICE	MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE	
						P ₂		Q	H
Single-Phase		£	Three-Phase		£	kW	HP	L/min	m
MCm15/50-F	2302040	1,887.00	MC15/50-F	2302080	1,851.00	1.1	1.5	100 - 800	14 - 1
MCm20/50-F	2302050	1,944.00	MC20/50-F	2302090	1,887.00	1.5	2	100 - 900	16 - 1
MCm30/50-F	2302060	2,382.00	MC30/50-F	2302100	1,920.00	2.2	3	100 - 1100	22 - 2
-	-	-	MC40/50-F	2302110	2,176.00	3	4	100 - 1100	24 - 4
MCm30/65-F	2302070	2,509.00	MC30/65-F	2302120	1,977.00	2.2	3	200 - 1500	12 - 2
-	-	-	MC40/65-F	2302130	2,259.00	3	4	200 - 1600	15 - 4

- Power cable: 10 metres as standard
- Impeller: **DOUBLE-CHANNEL precision cast stainless steel AISI 304**

Standard supply Single-Phase version:


- external float switch (manual pump available on request)
- capacitor box with capacitor included
- capacitor (inside the control panel)
- protector built-in to the motor winding

2.2 kW Single-Phase pumps, the thermal overload protector must be connected to the external control panel

For three-phase water pumps three thermal overload protection are built-in to the winding, in series, and must be connected to the control box

Guide Rail Kits

For Pump	Stock Code	DN	£
HORIZONTAL DELIVERY WITH ¾" RAILS (A)			
For VXC -50-F, MC /50-F	2302140	¾"	199.00
VERTICAL DELIVERY WITH ¾" RAILS (B)			
For VXC -50-F, MC /50-F	2302150	¾"	336.00
For VXC -65-F, MC /65-F	2302160	¾"	485.00
VERTICAL DELIVERY WITH 2" RAILS (C)			
For VXC -50-F, MC /50-F	2302170	2"	1,033.00
For VXC -65-F, MC /65-F	2302180	2"	1,203.00
SLIDE GUIDES			
For VXC -50-F, MC /50-F with guide tubes Ø ¾"	2302190	¾"	126.00
For VXC -65-F, MC /65-F with guide tubes Ø ¾"	2302200	¾"	170.00
For VXC -50-F, MC /50-F with guide tubes Ø 2"	2302210	2"	239.00
For VXC -65-F, MC /65-F with guide tubes Ø 2"	2302220	2"	340.00
INTERMEDIATE SUPPORT			
For guide tube Ø ¾"	2302230	¾"	22.00
For guide tube Ø 2"	2302240	2"	203.00

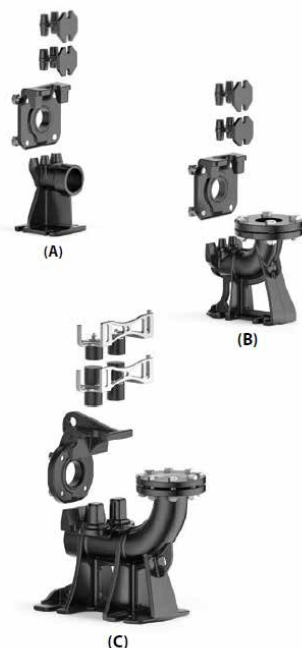

VX 55-65-80



Submersible Vortex Pumps for Sewage Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE		PASSAGE
			P ₂		Q	H	of solids
		£	kW	HP	L/min	m	mm
Three-Phase							
VX 40/50	2302490	2,824.00	3	4	100-900	22-5.5	Ø 50
VX 55/50	2302500	3,040.00	4	5.5	100-1000	25-6.5	Ø 50
VX 40/65	2302510	3,073.00	3	4	200-1200	15.6-2.5	Ø 65
VX 55/65	2302520	3,289.00	4	5.5	200-1350	19.4-3.7	Ø 65
VX 75/65	2302530	3,406.00	5.5	7.5	200-1500	23.6-5.5	Ø 65
VX 40/80	2302540	3,107.00	3	4	200-1200	11.5-3	Ø 80
VX 55/80	2302550	3,323.00	4	5.5	200-1400	16-4	Ø 80
VX 75/80	2302560	3,429.00	5.5	7.5	200-1600	21-4.5	Ø 80
4-POLE VERSION							
VX4 10/50	2305510	3,273.00	0.75	1	100-600	6.4-1	Ø 50
VX4 10/65	2305520	3,356.00	0.75	1	100-900	6-1	Ø 65
VX4 10/80	2305530	3,455.00	0.75	1	200-900	5.3-1	Ø 80

- Impeller: Cast Iron Vortex with an Epoxy Electro Coating treatment
- Power cable: 10 metres as standard

BC 35-50



Submersible Double Channel Pumps for Sewage Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE		PASSAGE
			P ₂		Q	H	of solids
		£	kW	HP	L/min	m	mm
Three-Phase							
BC 40/35	2302570	3,123.00	3	4	300-1500	18.5-5.5	Ø 35
BC 55/35	2302580	3,339.00	4	5.5	300-1700	22.5-7.5	Ø 35
BC 75/35	2302590	3,455.00	5.5	7.5	300-1900	27.5-10	Ø 35
BC 40/50	2302600	3,190.00	3	4	300-1800	16-4.5	Ø 50
BC 55/50	2302610	3,389.00	4	5.5	300-2100	20-6	Ø 50
BC 75/50	2302620	3,472.00	5.5	7.5	300-2300	24.5-7.5	Ø 50
4-POLE VERSION							
BC4 10/50	2305540	3,439.00	0.75	1	100-1200	5.8-1	Ø 50

- Power cable: 10 metres as standard
- Impeller: Cast Iron Vortex with an Epoxy Electro Coating treatment

Guide Rail Kits

For Pump	Stock Code	DN	£
HORIZONTAL DELIVERY WITH ¾" RAILS (A)			
VX /50,	2302640	2"	183.00
VERTICAL DELIVERY WITH ¾" RAILS (B)			
VX /50	2302660	2 ½"	326.00
VX /65, BC /35	2302670	3"	478.00
VX /80, BC /50	2302680	3"	485.00



(A)

(B)

VXC 4



Submersible Vortex Pumps for Sewage Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE		PASSAGE	
Three-Phase		£	P ₂ kW	HP	Q L/min	H m	of solids mm	
	VXC4 40/100	2302690	5,648.00	3	4	300 - 1700	7.6 - 2	Ø 100
	VXC4 50/100	2302700	5,731.00	3.7	5	300 - 2000	10.2 - 2.7	Ø 100
	VXC4 55/100	2302710	5,814.00	4	5.5	300 - 2200	11.7 - 3	Ø 100
	VXC4 100/80	2302720	11,297.00	7.5	10	800 - 4000	14.7 - 4.5	Ø 80
	VXC4 125/80	2302730	11,380.00	9.2	12.5	800 - 4250	16.7 - 5	Ø 80
	VXC4 150/80	2302740	11,463.00	11	15	800 - 4500	18.8 - 5.5	Ø 80
	VXC4 200/80	2302750	11,629.00	15	20	800 - 5000	22.1 - 7	Ø 80

- Power cable: 10 metres as standard
- Impeller: Cast Iron Vortex

MC 4



Submersible Double Channel Pumps for Sewage Water

MODEL	STOCK CODE	PRICE	POWER		PERFORMANCE		PASSAGE	
Three-Phase			P ₂		Q	H	of solids	
		£	kW	HP	L/min	m	mm	
	MC4 40/55	2302760	5,831.00	3	4	400 - 2200	10.5 - 3.5	Ø 55
	MC4 50/55	2302770	5,914.00	3.7	5	400 - 2400	12.5 - 4.8	Ø 55
	MC4 55/55	2302780	5,997.00	4	5.5	400 - 2600	13.9 - 5.3	Ø 55
	MC4 100/80	2302790	11,895.00	7.5	10	800 - 4250	17 - 7	Ø 80
	MC4 125/80	2302800	11,978.00	9.	12.5	800 - 4500	19 - 8	Ø 80
	MC4 150/80	2302810	12,061.00	11	15	800 - 4750	21 - 9.5	Ø 80
	MC4 200/80	2302820	12,227.00	15	20	800 - 5000	26 - 12.5	Ø 80

- Power cable: 10 metres as standard
- Impeller: Cast Iron Double Channel

Accessories

For Pump	Stock Code	Ref	DN	£
Counter flange for For MC4 /55	2302830	ASS14FL080MC4	DN 80	123.00
Counter flange for VXC4, MC4 /80	2302840	ASS14FL100VXC4	DN 100	143.00
Base for VXC4 /80, MC4 /80	2302850	ASSB01VXC4		548.00

- Counter flange complete with screws and seal
- Base complete with screws

Guide Rail Kit

For Pump	Stock Code	DN	£
VERTICAL DELIVERY WITH 2" RAILS			
VXC4, MC4 /80	2302860	4"	1,063.00
MC4 /55	2302870	3"	1,043.00

TRITUS-TX



Submersible Pumps c/w Grinder

NEW

MODEL	STOCK CODE	PRICE £	POWER P ₂		PERFORMANCE	
			kW	HP	Q L/min	H m
Single-Phase						
TRITUS-TX	2305460	673.00	0.75	0.75	10 - 90	11.5 - 1

- Grinder: high resistance tempered stainless steel
- Power cable: 10 metres as standard

TRITUS-INOX



Submersible Pumps c/w Grinder

MODEL	STOCK CODE	PRICE £	POWER P ₂		PERFORMANCE	
			kW	HP	Q L/min	H m
Single-Phase						
TIGm 0.55	2302250	1,176.00	0.55	0.75	50 - 600	11 - 2
TIGm 0.75	2302260	1,186.00	0.75	1	50 - 600	11 - 2
TIGm 1.1	2305470	1,273.00	1.1	1.5	50 - 600	11 - 2
TIGm 1.3	2305480	1,309.00	1.3	1.75	50 - 600	11 - 2

TRITUS



Submersible Pumps c/w Grinder

EXTENDED RANGE

MODEL	STOCK CODE	PRICE £	MODEL	STOCK CODE	PRICE £	POWER P ₂		PERFORMANCE	
						kW	HP	Q L/min	H m
Single-Phase			Three-Phase						
TRm 0.75	2302270	1,522.00	TR 0.75	2302330	1,395.00	0.75	1	20 - 125	15 - 2
TRm 0.9	2302280	1,555.00	TR 0.9	2302340	1,412.00	0.9	1.25	20 - 170	15 - 2
TRm 1.1	2302290	1,628.00	TR 1.1	2302350	1,485.00	1.1	1.5	20 - 140	21.5 - 2
TRm 1.3	2302300	1,661.00	TR 1.3	2302360	1,518.00	1.3	1.75	20 - 220	22.5 - 2
TRm 1.5	2302310	2,708.00	TR 1.5	2302370	2,352.00	1.5	2	20 - 270	25 - 2
-	-	-	TR 2.2	2302380	2,492.00	2.2	3	20 - 280	30 - 2
TRm 2.2 AP	2302320	3,489.00	TR 2.2 AP	2302390	2,708.00	2.2	3	20 - 275	35 - 2
-	-	-	TR 3 AP	2302400	2,847.00	3	4	20 - 305	42.5 - 2
			TR 3	2305490	3,057.00	3	4	20 - 400	33.5 - 2
			TR 4	2305500	3,146.00	4	5.5	20 - 410	39.5 - 2
			TR 5	2305600	6,014.00	5	6.7	20 - 420	46 - 2
			TR 6	2305610	6,197.00	6	8	20 - 430	54 - 2


- Grinder: high resistance tempered stainless steel
- Power cable: 10 metres as standard
- Impeller: technopolymer for TIG 0.55, TIG 0.75, TIG 1.1, TIG 1.3, TR 0.75, TR 0.9, TR 1.1, TR 1.3, precision cast AISI 304 stainless steel for TR 1.5, TR 2.2, TR 2.2 AP, TR 3 AP, TR 3, TR 4
- Two mechanical seals separated by an oil chamber
- Standard supply single-phase version: electrical cabinet with start-up and operating capacitors (not for TIG model), windings with built-in thermal overload protector, external float switch

TRITUS

 PEDROLLO
the spring of life

Guide Rail Kits

For Pump	Stock Code	DN	£
HORIZONTAL DELIVERY WITH ¾" RAILS (A)			
TR 0.75, TR 0.9, TR 1.1, TR 1.3	2302410	2"	173.00
TR 1.5, TR 2.2,	2302420	2"	173.00
TR 2.2 AP, TR 3 AP,	2302430	2"	206.00
VERTICAL DELIVERY WITH ¾" RAILS (B)			
TR 0.75, TR 0.9, TR 1.1, TR 1.3	2302440	2 ½"	299.00
TR 1.5, TR 2.2	2302450	2 ½"	299.00
TR 2.2 AP, TR 3 AP,	2302460	2 ½"	336.00
TR 5, TR 6	2305830	3"	1,150.00

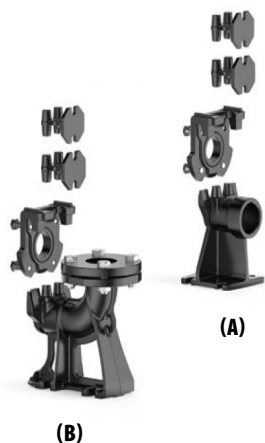



Domestic Series

COMPATTA EVO

SPECIFICATIONS

Vortex Impeller 2850 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 TG = Threephase with float switch
 Double Mechanical Seal



DNA series

SPECIFICATIONS

Vortex Impeller
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 TG = Threephase with float switch
 Double Mechanical Seal

DNB series

SPECIFICATIONS

S-Flow double channel impeller
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 TG = Threephase with float switch
 Double Mechanical Seal



A series

SPECIFICATIONS

Single / Three channel Impeller 2850 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 EX = Explosion proof version
 II 2 G d c IIB T4 X



V series with Vortex Impeller

SPECIFICATIONS

Vortex Impeller 2850 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 EX = Explosion proof version
 II 2 G d c IIB T4 X



V series 4 pole

SPECIFICATIONS

Single channel Impeller 1450 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 EX = Explosion proof version
 II 2 G d c IIB T4 X



VTH series

SPECIFICATIONS

Vortex Impeller T
 = 3 ~ 400V
 2850 rpm



GRIX series

SPECIFICATIONS

Grinder Impeller 2850 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 TG = Threephase with float switch



G series

Submersible Grinder pumps

SPECIFICATIONS

Grinder Impeller 2850 rpm
 G = Float Switch
 M = 1 ~ 230V
 T = 3 ~ 400V
 MG = Singlephase with float switch
 EX = Explosion proof version
 II 2 G d c IIB T4 X



For Dreno accessories including foot support & auto couplings please see pages 80-90.

COMPATTA EVO



Domestic Series

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER P ₂ kW	WEIGHT Kg
			£			
COMPATTA EVO 22 M	2302880	G 2"	740.00	40	0.56	19
COMPATTA EVO 22 M/G	2302890	G 2"	774.00	40	0.56	19
COMPATTA EVO 22 T	2302900	G 2"	749.00	40	0.56	16.5
COMPATTA EVO 22 T/G	2302910	G 2"	982.00	40	0.56	19.5
COMPATTA EVO 32 M	2302920	G 2"	816.00	40	0.75	19
COMPATTA EVO 32 M/G	2302930	G 2"	846.00	40	0.75	19
COMPATTA EVO 32 T	2302940	G 2"	829.00	40	0.75	19.5
COMPATTA EVO 32 T/G	2302950	G 2"	1,058.00	40	0.75	19.5
COMPATTA EVO 4 M	2302960	G 2"	1,134.00	50	1.1	21.5
COMPATTA EVO 4 M/G	2302970	G 2"	1,169.00	50	1.1	21.5
COMPATTA EVO 4 T	2302980	G 2"	1,143.00	50	1.1	21.5
COMPATTA EVO 4 T/G	2302990	G 2"	1,374.00	50	1.1	21.5
COMPATTA EVO 55 M	2303000	G 2"	1,283.00	50	1.5	23
COMPATTA EVO 55 M/G	2303010	G 2"	1,327.00	50	1.5	23
COMPATTA EVO 55 T	2303020	G 2"	1,262.00	50	1.5	23
COMPATTA EVO 55 T/G	2303030	G 2"	1,496.00	50	1.5	23

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

DNA SERIES



DNA Series

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER P ₂ kW	WEIGHT Kg
			£			
DNA 50-2/056 M	2305620	DN50 PN10 - G 2"	760.00	45	0.56	19
DNA 50-2/056 MG	2305630	DN50 PN10 - G 2"	797.00	45	0.56	19
DNA 50-2/056 T	2305640	DN50 PN10 - G 2"	770.00	45	0.56	19
DNA 50-2/056 TG	2305650	DN50 PN10 - G 2"	1,001.00	45	0.56	19
DNA 50-2/075 M	2305660	DN50 PN10 - G 2"	840.00	45	0.75	19.5
DNA 50-2/075 MG	2305670	DN50 PN10 - G 2"	865.00	45	0.75	19.5
DNA 50-2/075 T	2305680	DN50 PN10 - G 2"	850.00	45	0.75	19.5
DNA 50-2/075 TG	2305690	DN50 PN10 - G 2"	1,081.00	45	0.75	19.5
DNA 50-2/110 M	2305700	DN50 PN10 - G 2"	1,395.00	50	1.1	28
DNA 50-2/110 MG	2305710	DN50 PN10 - G 2"	1,444.00	50	1.1	28
DNA 50-2/110 T	2305720	DN50 PN10 - G 2"	1,328.00	50	1.1	28
DNA 50-2/110 TG	2305730	DN50 PN10 - G 2"	1,562.00	50	1.1	28
DNA 50-2/150 M	2305740	DN50 PN10 - G 2"	1,484.00	50	1.5	29
DNA 50-2/150 MG	2305750	DN50 PN10 - G 2"	1,534.00	50	1.5	29
DNA 50-2/150 T	2305760	DN50 PN10 - G 2"	1,431.00	50	1.5	29
DNA 50-2/150 TG	2305770	DN50 PN10 - G 2"	1,662.00	50	1.5	29
DNA 50-2/220 T	2305780	DN50 PN10 - G 2"	1,623.00	50	2.2	30
DNA 50-2/220-1 T	2305790	DN50 PN10 - G 2"	1,623.00	50	2.2	30
DNA 50-4/090 M	2305800	DN50 PN10 - G 2"	1,766.00	50	0.9	30
DNA 50-4/090 MG	2305810	DN50 PN10 - G 2"	1,895.00	50	0.9	30
DNA 50-4/090 T	2305820	DN50 PN10 - G 2"	1,713.00	50	0.9	30

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

DNA SERIES



DNA Series

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
DNA 65-2/110 M	2303040	DN 65 PN 10	1,463.00	65	1.1	29
DNA 65-2/110 MG	2303050	DN 65 PN 10	1,510.00	65	1.1	29
DNA 65-2/110 T	2303060	DN 65 PN 10	1,400.00	65	1.1	29
DNA 65-2/110 TG	2303070	DN 65 PN 10	1,630.00	65	1.1	29
DNA 65-2/150 M	2303080	DN 65 PN 10	1,562.00	65	1.1	32
DNA 65-2/150 MG	2303090	DN 65 PN 10	1,613.00	65	1.1	32
DNA 65-2/150 T	2303100	DN 65 PN 10	1,514.00	65	1.5	32
DNA 65-2/150 TG	2303110	DN 65 PN 10	1,746.00	65	1.5	32
DNA 65-2/220 T	2303120	DN 65 PN 10	1,696.00	65	2.2	33
DNA 80-2/110 M	2303130	DN 80 PN 16	1,554.00	80	1.1	32
DNA 80-2/110 MG	2303140	DN 80 PN 16	1,602.00	80	1.1	32
DNA 80-2/110 T	2303150	DN 80 PN 16	1,499.00	80	1.1	32
DNA 80-2/110 TG	2303160	DN 80 PN 16	1,728.00	80	1.1	32
DNA 80-2/150 M	2303170	DN 80 PN 16	1,696.00	80	1.5	34
DNA 80-2/150 MG	2303180	DN 80 PN 16	1,746.00	80	1.5	34
DNA 80-2/150 T	2303190	DN 80 PN 16	1,648.00	80	1.5	34
DNA 80-2/150 TG	2303200	DN 80 PN 16	1,879.00	80	1.5	34
DNA 80-2/220 T	2303210	DN 80 PN 16	1,810.00	80	2.2	35
DNA 80-4/090 M	2303220	DN 80 PN 16	2,019.00	80	0.9	38
DNA 80-4/090 MG	2303230	DN 80 PN 16	2,142.00	80	0.9	38
DNA 80-4/090 T	2303240	DN 80 PN 16	1,960.00	80	0.9	38

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

For Dreno accessories including foot support & auto couplings please see pages 88-90.

DNB SERIES



DNB Series 2-4 Poles

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
DNB 65-2/080 M	2303250	DN 65 PN10 G2"	952.00	50	0.8	21
DNB 65-2/080 MG	2303260	DN 65 PN10 G2"	1,037.00	50	0.8	21
DNB 65-2/080 T	2303270	DN 65 PN10 G2"	982.00	50	0.8	21
DNB 65-2/080 TG	2303280	DN 65 PN10 G2"	1,198.00	50	0.8	21
DNB 65-2/110 M	2303290	DN 65 PN10 G2"	1,463.00	50	1.1	29
DNB 65-2/110 MG	2303300	DN 65 PN10 G2"	1,510.00	50	1.1	29
DNB 65-2/110 T	2303310	DN 65 PN10 G2"	1,400.00	50	1.1	29
DNB 65-2/110 TG	2303320	DN 65 PN10 G2"	1,630.00	50	1.1	29
DNB 65-2/150 M	2303330	DN 65 PN10 G2"	1,562.00	50	1.5	31
DNB 65-2/150 MG	2303340	DN 65 PN10 G2"	1,613.00	50	1.5	31
DNB 65-2/150 T	2303350	DN 65 PN10 G2"	1,514.00	50	1.5	31
DNB 65-2/150 TG	2303360	DN 65 PN10 G2"	1,746.00	50	1.5	31
DNB 65-2/220 T	2303370	DN 65 PN10 G2"	1,696.00	50	2.2	35
DNB 65-2/220-1 T	2303380	DN 65 PN10 G2"	1,701.00	50	2.2	36
DNB 65-2/220-2 T	2303390	DN 65 PN10 G2"	1,701.00	50	2.2	36
DNB 80-2/150 M	2303400	DN 80 PN 16	1,723.00	70	1.5	32.5
DNB 80-2/150 MG	2303410	DN 80 PN 17	1,775.00	70	1.5	32.5
DNB 80-2/150 T	2303420	DN 80 PN 18	1,678.00	70	1.5	32.5
DNB 80-2/150 T/G	2303430	DN 80 PN 19	1,910.00	70	1.5	32.5
DNB 80-2/220 T	2303440	DN 80 PN 20	1,846.00	70	2.2	34.5
DNB 80-2/220-1 T	2303450	DN 80 PN 21	1,846.00	70	2.2	35
DNB 80-4/110 M	2303460	DN 80 PN 22	2,081.00	70	1.1	36
DNB 80-4/110 MG	2303470	DN 80 PN 23	2,209.00	70	1.1	36
DNB 80-4/110 T	2303480	DN 80 PN 24	2,026.00	70	1.1	36

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

A SERIES



A Series 2 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
AM 65/2/125 C.236	2303490	DN65 PN10	2,974.00	40	1.5	44.5
AM 65/2/125 C.236/G	2303500	DN65 PN10	3,139.00	40	1.5	44.5
AT 65/2/125 C.236	2303510	DN65 PN10	2,132.00	40	1.5	43
AT 65/2/125 C.237	2303520	DN65 PN10	2,514.00	40	2.2	43.5
AT 65/2/152 C.246	2303530	DN65 PN10	3,522.00	45	3	60
AT 65/2/152 C.247	2303540	DN65 PN10	4,647.00	45	4	62.5
AT 80/2/152 C.246	2303550	DN80 PN16	4,114.00	45	3	61
AT 80/2/152 C.247	2303560	DN80 PN16	5,252.00	45	4	65
AT 80/2/173 C.254	2303570	DN80 PN16	5,910.00	55	5.5	92
AT 80/2/173 C.257	2303580	DN80 PN16	6,867.00	55	7.5	93
AT 80/2/173 C.259	2303590	DN80 PN16	7,959.00	55	9.5	94.5

M = 1~230V T = 3~400V

For Dreno accessories including foot support & auto couplings please see pages 88-90.

A SERIES



A Series 4 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
AM 80/4/125 C.242	2303600	DN80 PN16	3,506.00	75	1.5	58
AM 80/4/125 C.242/G	2303610	DN80 PN16	3,631.00	75	1.5	58
AT 80/4/125 C.242	2303620	DN80 PN16	2,636.00	75	1.5	56
AT 80/4/152 C.244	2303630	DN80 PN16	3,295.00	75	2.2	69
AT 80/4/152 C.245	2303640	DN80 PN16	3,683.00	75	3	70
AT 100/4/152 C.243	2303650	DN100 PN16	3,203.00	90	1.7	73
AT 100/4/152 C.244	2303660	DN100 PN16	3,623.00	90	2.2	73,5
AT 100/4/152 C.245	2303670	DN100 PN16	4,046.00	90	3	75,5
AT 100/4/173 C.255	2303680	DN100 PN16	5,582.00	90	4	103
AT 100/4/173 C.256	2303690	DN100 PN16	6,549.00	90	5.5	108
AT 150/4/173 C.256	2303700	DN150 PN16	8,916.00	100	5.8	131
AT 150/4/173 C.258	2303710	DN150 PN16	9,893.00	100	7.5	133
AT 150/4/200 C.260	2303720	DN150 PN16	11,233.00	80	10	230
AT 150/4/200 C.263	2303730	DN150 PN16	12,614.00	80	16.5	256
AT 150/4/200 C.264	2303740	DN150 PN16	13,492.00	110	12	260
AT 150/4/200 C.265	2303750	DN150 PN16	18,074.00	110	16	276
AT 150/4/240 C.275	2303760	DN150 PN16	21,929.00	120	20	308
AT 150/4/240 C.280	2303770	DN150 PN16	25,455.00	120	25	328
AT 150/4/340 C.285	2303780	DN150 PN16	30,896.00	110	35	550
AT 150/4/340 C.290	2303790	DN150 PN16	38,262.00	120	40	585
AT 150/4/340 C.295	2303800	DN150 PN16	44,497.00	130	51	600
AT 150/4/340 C.300	2303810	DN150 PN16	45,956.00	140	60	600
AT 200/4/200 C.265	2303820	DN200 PN10	22,031.00	110	15	296
AT 200/4/200 C.270	2303830	DN200 PN10	24,118.00	110	20	340
AT 200/4/200 C.275	2303840	DN200 PN10	26,331.00	110	20	340
AT 200/4/200 C.280	2303850	DN200 PN10	29,884.00	110	26	343

M = 1~230V T = 3~400V

V SERIES



V Series 2 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
VM 65/2/125 C.336	2303860	DN65 PN10	2,974.00	50	1.5	43.5
VM 65/2/125 C.336/G	2303870	DN65 PN10	3,139.00	50	1.5	43.5
VT 65/2/125 C.336	2303880	DN65 PN10	2,132.00	50	1.5	41.5
VT 65/2/125 C.337	2303890	DN65 PN10	2,514.00	50	2.2	42.5
VT 65/2/152 C.346	2303900	DN65 PN10	3,522.00	60	3	59
VT 65/2/152 C.347	2303910	DN65 PN10	4,647.00	60	4	62
VT 80/2/152 C.346	2303920	DN80 PN16	4,114.00	65	3.2	63.5
VT 80/2/152 C.347	2303930	DN80 PN16	5,252.00	65	4.2	63.5
VT 80/2/173 C.354	2303940	DN80 PN16	5,910.00	70	5.2	86.5
VT 80/2/173 C.357	2303950	DN80 PN16	6,867.00	70	7.5	91
VT 80/2/173 C.359	2303960	DN80 PN16	7,959.00	70	9	92

M = 1~230V T = 3~400V

For Dreno accessories including foot support & auto couplings please see pages 88-90.

V SERIES



V Series 4 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
VT 65/4/152 C.344	2303970	DN65 PN10	2,949.00	65	2.2	66
VT 65/4/152 C.345	2303980	DN65 PN10	3,344.00	65	3	67
VM 80/4/125 C.341	2303990	DN80 PN16	3,271.00	75	1.1	48
VM 80/4/125 C.341/G	2304000	DN80 PN16	3,402.00	75	1.1	48
VT 80/4/125 C.341	2304010	DN80 PN16	2,438.00	75	1.1	48
VM 80/4/125 C.342	2304020	DN80 PN16	3,506.00	75	1.25	48
VM 80/4/125 C.342/G	2304030	DN80 PN16	3,631.00	75	1.25	48
VT 80/4/125 C.342	2304040	DN80 PN16	2,636.00	75	1.25	48
VT 80/4/152 C.344	2304050	DN80 PN16	3,295.00	80	2.2	66
VT 80/4/152 C.345	2304060	DN80 PN16	3,683.00	80	3	70
VT 100/4/152 C.348	2304070	DN100 PN16	3,203.00	100	1.7	69
VT 100/4/152 C.349	2304080	DN100 PN16	3,623.00	100	2.2	69
VT 100/4/152 C.350	2304090	DN100 PN16	4,046.00	100	3	72
VT 100/4/173 C.355	2304100	DN100 PN16	5,582.00	90	4	100.5
VT 100/4/173 C.356	2304110	DN100 PN16	6,549.00	90	6	107
VT 100/4/173 C.358	2304120	DN100 PN16	7,551.00	90	7.5	110
VT 100/4/200 C.362	2304130	DN100 PN16	10,713.00	90	12	192
VT 100/4/200 C.363	2304140	DN100 PN16	12,032.00	90	15	205
VT 150/4/340 C.385	2304180	DN150 PN16	30,896.00	130	35	550
VT 150/4/340 C.390	2304190	DN150 PN16	38,262.00	130	45	585
VT 150/4/340 C.395	2304200	DN150 PN16	44,497.00	130	55	590

M = 1~230V T = 3~400V

VTH SERIES



VTH Series 2 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
VTH 80-2/120	2304210	DN 80 PN 16	10,120.00	80	12	186
VTH 80-2/150	2304220	DN 80 PN 16	12,614.00	80	15	195
VTH 80-2/200	2304230	DN 80 PN 16	14,930.00	80	20	242
VTH 80-2/250	2304240	DN 80 PN 16	16,747.00	80	25	244
VTH 100-2/150	2304250	DN 100 PN 16	13,074.00	100	15	208
VTH 100-2/200	2304260	DN 100 PN 16	15,393.00	100	20	253
VTH 100-2/250	2304270	DN 100 PN 16	17,209.00	100	25	257
VTH 100-2/300	2304280	DN 100 PN 16	20,655.00	100	30	273
VTH 100-2/350	2304290	DN 100 PN 16	22,721.00	100	35	274
VTH 100-2/400	2304300	DN 100 PN 16	24,476.00	100	40	278
VTH 100-2/400/1	2304310	DN 100 PN 16	24,758.00	100	40	281
VTH 100-2/400/2	2304320	DN 100 PN 16	25,077.00	110	40	282

For Dreno accessories including foot support & auto couplings please see pages 88-90.

GRIX SERIES GRINDER



GRIX Series 2 Pole

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
GRIX 32-2/090 M	2304330	G 1" ¼ DN32 PN6	1,146.00	-	0.9	21.5
GRIX 32-2/090 MG	2304340	G 1" ¼ DN32 PN6	1,274.00	-	0.9	21.5
GRIX 32-2/090 T	2304350	G 1" ¼ DN32 PN6	1,091.00	-	0.9	21
GRIX 32-2/090 TG	2304360	G 1" ¼ DN32 PN6	1,321.00	-	0.9	21
GRIX 32-2/110 M	2304370	G 1" ¼ DN32 PN6	1,597.00	-	1.1	25
GRIX 32-2/110 MG	2304380	G 1" ¼ DN32 PN6	1,718.00	-	1.1	25
GRIX 32-2/110 T	2304390	G 1" ¼ DN32 PN6	1,529.00	-	1.1	25.5
GRIX 32-2/110 TG	2304400	G 1" ¼ DN32 PN6	1,759.00	-	1.1	25.5
GRIX 32-2/140 M	2304410	G 1" ¼ DN32 PN6	1,737.00	-	1.4	27.5
GRIX 32-2/140 MG	2304420	G 1" ¼ DN32 PN6	1,860.00	-	1.4	27.5
GRIX 32-2/140 T	2304430	G 1" ¼ DN32 PN6	1,662.00	-	1.4	28
GRIX 32-2/140 TG	2304440	G 1" ¼ DN32 PN6	1,895.00	-	1.4	28

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

Single phase GRIX pumps are supplied with a starter/capacitor box.

G SERIES GRINDER



G Series 2 Pole M = 1~230V T = 3~400V

MODEL	STOCK CODE	DELIVERY	PRICE	SOLID Ømm	POWER	WEIGHT
			£		P ₂ kW	Kg
GX 50-2/090 M	2304450	G 2"	1,701.00	6	0.9	25
GX 50-2/090 M	2304460	G 2"	1,927.00	6	0.9	25
GX 50-2/090 M/G	2304470	G 2"	1,830.00	6	0.9	25
GX 50-2/090 M/G	2304480	G 2"	2,048.00	6	0.9	25
GX 50-2/090 T	2304490	G 2"	1,614.00	6	0.9	24
GX 50-2/0110 M	2304500	G 2"	2,221.00	6	1.1	25
GX 50-2/0110 M	2304510	G 2"	2,568.00	6	1.1	25
GX 50-2/0110 M/G	2304520	G 2"	2,345.00	6	1.1	25
GX 50-2/0110 M/G	2304530	G 2"	2,689.00	6	1.1	25
GX 50-2/0110 T	2304540	G 2"	2,123.00	6	1.1	25
GX 50-2/0150 M	2304550	G 2"	2,229.00	6	1.5	34
GX 50-2/0150 M	2304560	G 2"	2,613.00	6	1.5	34
GX 50-2/0150 M/G	2304570	G 2"	2,355.00	6	1.5	34
GX 50-2/0150 M/G	2304580	G 2"	2,738.00	6	1.5	34
GX 50-2/0150 T	2304590	G 2"	2,132.00	6	1.5	34
GX 50-2/0220 T	2304600	G 2"	2,387.00	6	1.5	34
GM 50/2/125 C.155	2304610	G 2" DN32 PN6	3,332.00	6	1.7	37.5
GM 50/2/125 C.155/G	2304620	G 2" DN32 PN6	3,523.00	6	1.7	37.5
GT 50/2/125 C.155	2304630	G 2" DN32 PN6	2,642.00	6	1.7	36.5
GM 50/2/125 C.160	2304640	G 2" DN32 PN6	3,767.00	6	2.3	40
GM 50/2/125 C.160/G	2304650	G 2" DN32 PN6	3,964.00	6	2.3	40
GT 50/2/125 C.160	2304660	G 2" DN32 PN6	3,171.00	6	2.3	38.5
GT 50/2/152 C.165	2304670	G 2" DN50 PN10	4,478.00	8	3.2	61
GT 50/2/152 C.170	2304680	G 2" DN50 PN10	5,724.00	8	4.2	62
GT 50/2/173 C.175	2304690	G 2" DN50 PN10	7,800.00	10	6.2	85
GT 50/2/173 C.180	2304700	G 2" DN50 PN10	8,819.00	10	7.8	86
GT 50/2/173 C.185	2304710	G 2" DN50 PN10	9,964.00	10	9.5	90

M = 1~230V MG = 1~230V + Float Switch T = 3~400V TG = 3~400V + Float Switch

Single phase pumps supplied with control box made up of:

Switch, Overload Protection, Control Electrode, Relay for float switch, Start Capacitor and 24V exits for protection kit


For Dreno accessories including foot support & auto couplings please see pages 88-90.



Foot Support

MODEL	STOCK CODE	PRICE
		£
P1 GM - GT 50/2/125	2304720	142.00
P2 GT 50/2/152	2304730	185.00
P3 GT 50/2/173	2304740	199.00
P4 AT - VT - HT 65	2304750	137.00
P5 AT - VT 80	2304760	173.00
P6 AT - VT 100	2304770	228.00
P7 AT - VT 150	2304780	298.00
P8 AT -VT 150 (Bayonet Joint)	2304790	418.00
P9 AT 200	2304800	532.00

Free Standing Installation



Threaded Coupling Flange with Thread PN16

MODEL	STOCK CODE	PRICE
		£
F1 DN65 (Square)	2304810	112.00
F2 DN80	2304820	134.00
F3 DN100	2304830	162.00
F4 DN150	2304840	232.00

Free Standing Installation



Flanged Hose Connection

MODEL	STOCK CODE	PRICE
		£
N1 DN65 (Square)	2304850	185.00
N2 DN80	2304860	251.00
N3 DN100	2304870	296.00
N4 DN150	2304880	416.00

Free Standing Installation



Threaded Automatic Coupling Foot

MODEL	STOCK CODE	PRICE
		£
DUTY 50 (flanged) (DN32 PN6 / DN50 PN10)	2304890	376.00
DUTY 65 (flanged) (DN65 PN10)	2304900	561.00
DUTY 80 (flanged) (DN80 PN16)	2304910	644.00
DUTY 100 (flanged) (DN100 PN16)	2304920	765.00

Fixed Installation



Automatic Coupling Foot "Easy" Type A

MODEL	STOCK CODE	PRICE
		£
E1.1 1" ¼	2304930	216.00
E2.1 1" ½	2304940	233.00
E3.1 2"	2304950	241.00
E4.1 2" female (for C.149/150)	2304960	286.00

* Standard installation

Fixed Installation



Automatic Coupling Foot "Easy" Type B

MODEL	STOCK CODE	PRICE
		£
E1.2 1" ¼	2304970	196.00
E2.2 1" ½	2304980	202.00
E3.2 2"	2304990	216.00
E4.2 2" female (for C.149/150)	2305000	241.00

* Installation for pumping stations

Fixed Installation



Automatic Coupling Foot Type B

MODEL	STOCK CODE	PRICE
		£
B4 DN 65 PN6	2305010	765.00
B5 DN 80 PN16	2305020	1,119.00
B6 DN 100 PN16	2305030	1,492.00
B7 DN 150 PN16 (low)	2305040	2,103.00
B8 DN 150 PN16 (high)	2305050	2,932.00

* Complete with coupling support and guide rails bracket

Fixed Installation



Guide Rails Bracket for Threaded Automatic Coupling Foot

MODEL	STOCK CODE	PRICE
		£
Easy 1" ¼ - 1" ½ - 2" (Type A)	2305060	54.00


Installation Accessories



Guide Rails Bracket for Automatic Coupling Foot Type B

MODEL	STOCK CODE	PRICE
		£
Duty 50 - Easy 1" ¼ - 1" ½ - 2" (Type B)	2305070	44.00
DN 65	2305080	138.00
DN 80-100-150-200	2305090	162.00
PN10 DN80 Adaptor Claw	2305100	295.00

Installation Accessories



Coupling Support PN16 for Threaded Automatic Coupling Foot

MODEL	STOCK CODE	PRICE
		£
1" ¼ M - Easy	2305110	80.00
1" ½ M - Easy	2305120	88.00
2" M - Easy	2305130	93.00
2" F - Easy	2305140	100.00
DUTY 50	2305150	170.00

Installation Accessories



Coupling Support PN16 for Automatic Coupling foot Type B

MODEL	STOCK CODE	PRICE
		£
DN 65	2305160	304.00
DN 80	2305170	354.00
DN 100	2305180	450.00
DN 150 (High/Low)	2305190	642.00

Installation Accessories



Chain AISI 316

MODEL	STOCK CODE	Ø	MAX LOAD/	PRICE
		mm	Kg	per metre
				£
Mod. 26	2305200	3	100	34.00
Mod. 42	2305210	6	200	49.00
Mod. 65	2305220	10	600	112.00
Hook A2 Ø4	2305230			31.00
Hook A2 Ø8	2305240			39.00
Hook A2 Ø10	2305250			50.00

Installation Accessories